

All-Flo™ Pulsation Dampeners PDT SERIES AND PDM SERIES



a DOVER company

Where Innovation Flows



All-Flo™ PDT Series and PDM Series Pulsation Dampeners are recommended accessory products that help expand the application range and augment the performance of All-Flo Air-Operated Double-Diaphragm (AODD) Pumps. Installed at the pump's discharge, All-Flo pulsation dampeners reduce fluid pressure and flow fluctuations to provide a smoother discharge flow. This function is critical in applications that need to minimize system vibration in order to protect and enhance the accuracy of downstream instrumentation. It also extends equipment life by reducing the load on the pump.


FEATURES AND BENEFITS

- Provides steady discharge pressure and flow
- Reduces system vibration
- Reduces load on the pump
- Protects downstream instrumentation
- Increases equipment life


APPLICATIONS

- Container filling
- Metering and dosing
- Food production
- General industrial
- Paints, resins, and coatings
- Water and wastewater
- Filtration
- Ceramics
- Semiconductor

WITHOUT PULSATION DAMPENER INSTALLED

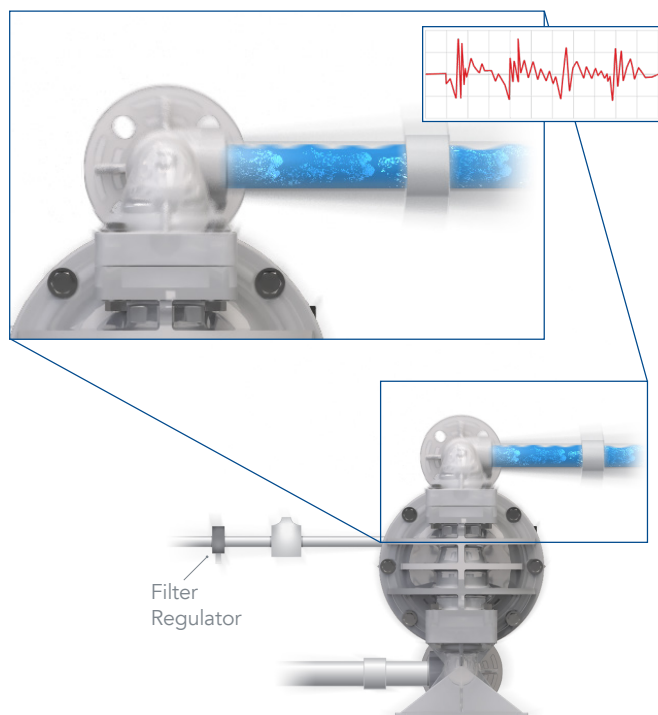

WITH PULSATION DAMPENER INSTALLED

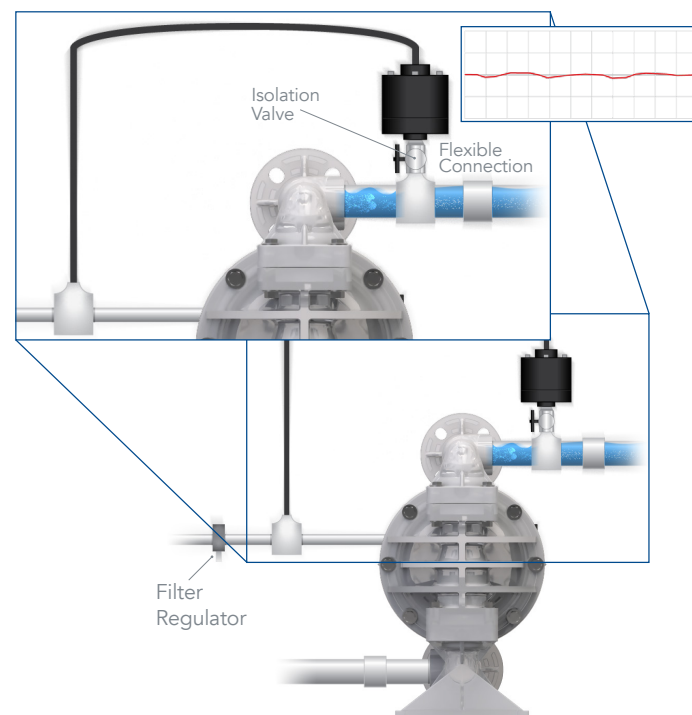

PRODUCT SERIES: PDT



PDT Series Pulsation Dampeners are available in conductive plastic construction, which is ideally suited for applications that require grounding (lowering the risk of electrostatic charges).

PDT X X X			1 2 3 4			
DAMPENER SIZE			1 CONNECTION TYPE			
038 = 3/8 in.			M = MNPT			
050 = 1/2 in.			A = ANSI FLANGE (NOT AVAILABLE IN 3/8")			
100 = 1 in.			2 HOUSING MATERIAL			
150 = 1-1/2 in.			J = CONDUCTIVE POLYETHYLENE			
200 = 2 in.			U = CONDUCTIVE PTFE			
			3 DIAPHRAGM MATERIAL			
			E = EPDM			
			T = PTFE			
			N = NBR			
			4 MATERIALS OF AIR SIDE			
			J = CONDUCTIVE POLYETHYLENE			

PRODUCT SERIES: PDM



PDM Series Pulsation Dampeners are available in bolted metal construction and can be used in a wide range of aggressive applications.

PDM X X X			1 2 3 4			
DAMPENER SIZE			1 CONNECTION TYPE			
100 = 1 in.			M = MNPT			
150 = 1-1/2 in.			B = BSPT			
200 = 2 in.			A = ANSI FLANGE (ONLY AVAILABLE IN 3")			
300 = 3 in.			D = DIN FLANGE (ONLY AVAILABLE IN 3")			
			2 HOUSING MATERIAL			
			3 = 316 STAINLESS STEEL			
			3 DIAPHRAGM MATERIAL			
			T = PTFE			
			4 MATERIALS OF AIR SIDE			
			3 = 316 STAINLESS STEEL			

ALF-14070-F-03

Copyright 2022 PSG®, a Dover company

Authorized PSG® Partner:

Where Innovation Flows



ALL-FLO

PSG
22069 Van Buren Street
Grand Terrace, CA 92313-5651 USA
P: +1 (440) 354-1700 • F: +1 (440) 354-9466
all-flo.com