

GPS820/GPS830 CSA-CERTIFIED METAL PUMP

**51 mm (2") Pump
 Maximum Flow Rate:
 645 lpm (171 gpm)**

DIMENSIONAL DRAWING

PUMP DATA

Specifications:

Height..... 820 Threaded 670 mm (26.4")
 830 Flanged 760 mm (29.9")
 Width..... 453 mm (17.9")
 Depth..... Aluminum ADS 366 mm (14.4")
 Stainless Steel ADS 354 mm (13.9")
 Ship Weight.....
 820 Threaded AL 47 kg (104 lb)
 830 Flanged AL 54 kg (118 lb)
 820 Threaded SS 73 kg (161 lb)
 830 Flanged SS 81 kg (178 lb)
 Air Inlet 19 mm (3/4")
 Inlet..... 51 mm (2")
 Outlet..... 51 mm (2")



22069 Van Buren Street
 Grand Terrace, CA 92313-5651 USA
 O: +1 (909) 422-1730 F: +1 (909) 783-3440
www.psgdover.com




a **DOVER** company
psgdover.com

GPS820/GPS830 CSA-CERTIFIED METAL PUMP

PERFORMANCE

**GPS820/GPS830 METAL
EZ-INSTALL TPE-FITTED**

Max. Flow Rate.....645 lpm (171 gpm)
 Max. Inlet Pressure6.9 bar (100 psig)
 Max. Size Solids..... 6.4 mm (1/4")
 Max. Suction Lift.....5.5 m Dry (18.2')
 9.0 m Wet (29.5')

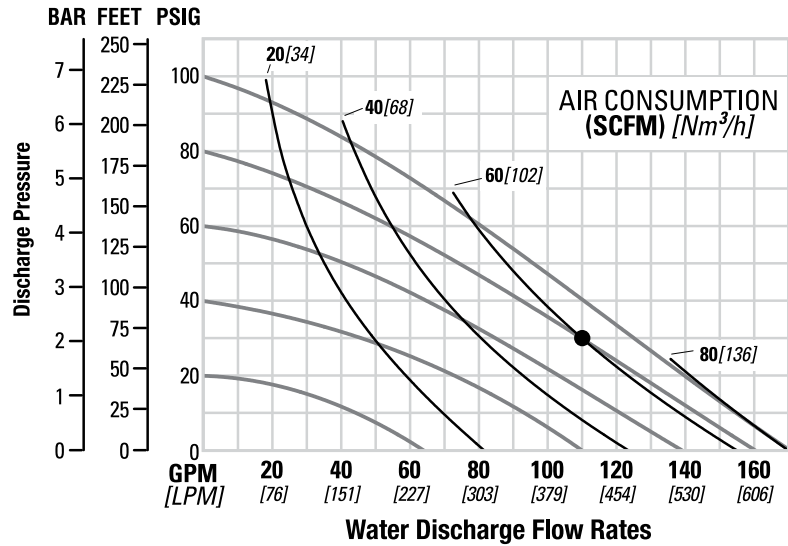

**GPS820/GPS830 METAL
FULL-STROKE PTFE-FITTED**

Max. Flow Rate.....636 lpm (168 gpm)
 Max. Inlet Pressure6.9 bar (100 psig)
 Max. Size Solids..... 6.4 mm (1/4")
 Max. Suction Lift.....6.1 m Dry (20.0')
 9.0 m Wet (29.5')

